



**Model: 23896CAMA/W20**

Basic size of  
 mm

d:	480
D:	600
B:	90

The basic rated load is  
 kN

trends C:	1440
static state Co:	3750
Fatigue load limit	280
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	530
limit speed:	1100
quality:	61

model

Column hole:	23896CAMA/W20
conical bore:	23896CAKMA/W20
	0

Dimensions are  
 mm



d:	480
d <sub>2</sub> ~ :	521
D1 ~ :	566
b:	-
k:	7.5
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	493
Da the max:	587
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.13
----	------

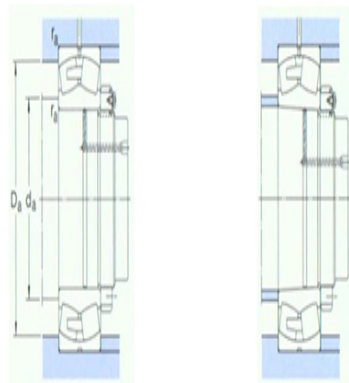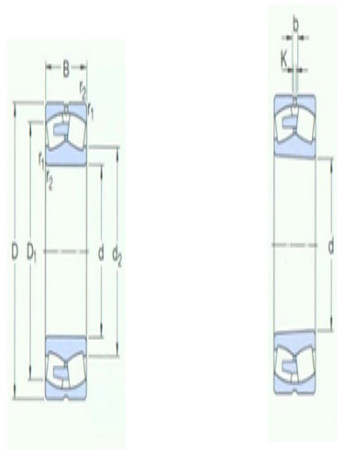

Y1:	5.2
Y2:	7.7
Y0:	5