



Model: 23096CA/W33

Basic size of
 mm

d:	480
D:	700
B:	165

The basic rated load is
 kN

trends C:	3900
static state Co:	6800
Fatigue load limit Pu:	450

Rated rotation speed is
 r/min

Refer to the speed:	530
limit speed:	950
quality:	215

model

Column hole:	*23096CA/W33
conical bore:	*23096CAK/W33

Dimensions are
 mm



d:	480
d ₂ ~ :	547
D1 ~ :	633
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	503
Da the max:	677
r _a the max:	5

Calculation coefficient

e:	0.21
Y1:	3.2

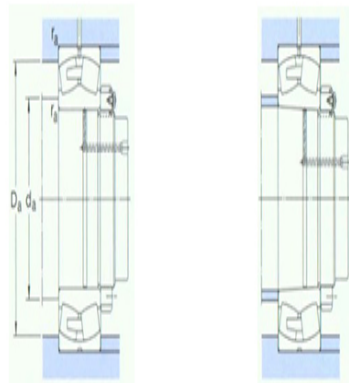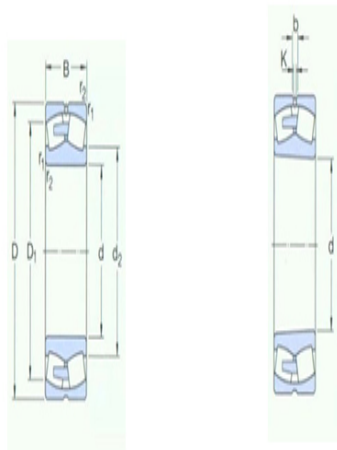

Y2:	4.8
Y0:	3.2