



**Model: 24096ECA/W33**

Basic size of  
 mm

d:	480
D:	700
B:	218

The basic rated load is  
 kN

trends C:	5300
static state Co:	10400
Fatigue load limit Pu:	695

Rated rotation speed is  
 r/min

Refer to the speed:	450
limit speed:	750
quality:	285

model

Column hole:	*24096ECA/W33
conical bore:	*24096ECAK30/W3 3

Dimensions are  
 mm



d:	480
d <sub>2</sub> ~ :	541
D1 ~ :	619
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	503
Da the max:	677
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.28
----	------

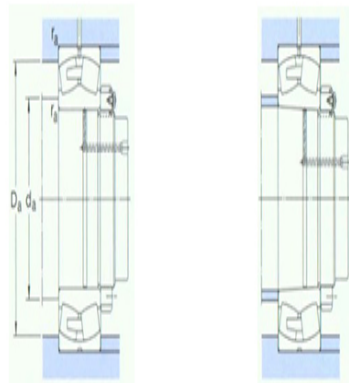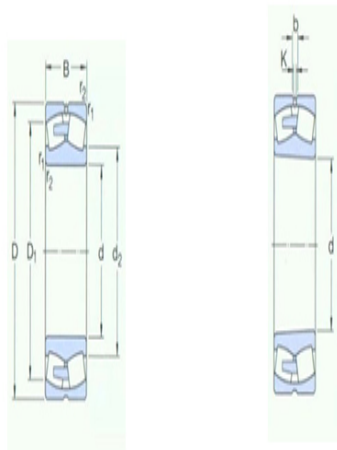

Y1:	2.4
Y2:	3.6
Y0:	2.5