



Model: 23196CA/W33

Basic size of
 mm

d:	480
D:	790
B:	248

The basic rated load is
 kN

trends C:	6950
static state Co:	12000
Fatigue load limit Pu:	780

Rated rotation speed is
 r/min

Refer to the speed:	400
limit speed:	750
quality:	485

model

Column hole:	*23196CA/W33
conical bore:	*23196CAK/W33

Dimensions are
 mm



d:	480
d ₂ ~ :	577
D1 ~ :	692
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	512
Da the max:	758
r _a the max:	6

Calculation coefficient

e:	0.3
Y1:	2.3

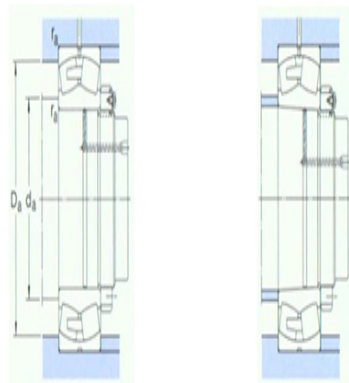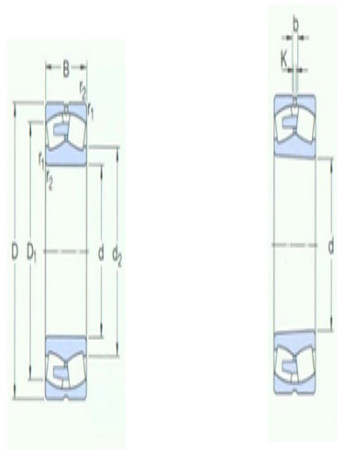

Y2:	3.4
Y0:	2.2