



Model: 24196ECA/W33

Basic size of
 mm

d:	480
D:	790
B:	308

The basic rated load is
 kN

trends C:	9000
static state Co:	15600
Fatigue load limit Pu:	1040

Rated rotation speed is
 r/min

Refer to the speed:	340
limit speed:	630
quality:	605

model

Column hole:	*24196ECA/W33
conical bore:	*24196ECAK30/W3 3

Dimensions are
 mm



d:	480
d ₂ ~ :	564
D1 ~ :	678
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	512
Da the max:	758
r _a the max:	6

Calculation coefficient

e:	0.37
----	------

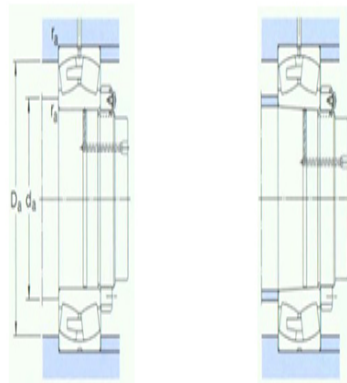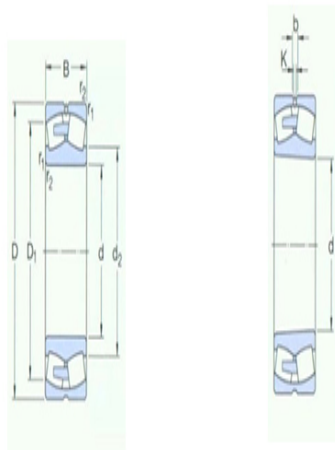

Y1:	1.8
Y2:	2.7
Y0:	1.8