



Model: 238/500CAMA/W2

0

Basic size of
mm

d:	500
D:	620
B:	90

The basic rated load is
kN

trends C:	1480
static state Co:	4000
Fatigue load limit Pu:	290

Rated rotation speed is
r/min

Refer to the speed:	530
limit speed:	1000
quality:	62

model



Column hole:	238/500CAMA/W20
conical bore:	238/500CAKMA/W20

Dimensions are
mm

d:	500
d ₂ ~ :	543
D1 ~ :	587
b:	-
k:	7.5
r _{1,2} the min:	3

Shoulder gear and chamfer size
mm

d _a the min:	513
Da the max:	607
r _a the max:	2.5

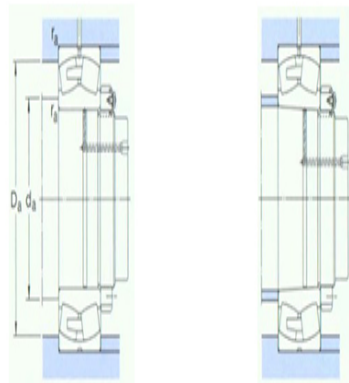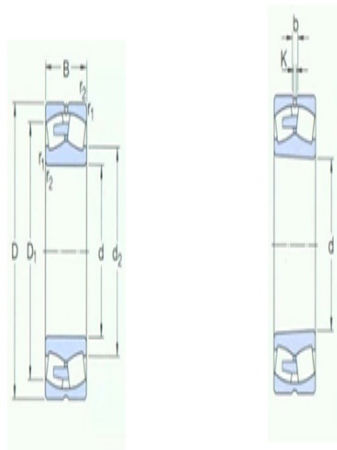

Calculation coefficient

e:	0.12
Y1:	5.6
Y2:	8.4
Y0:	5.6