



Model: 239/500CA/W33

Basic size of
 mm

d:	500
D:	670
B:	128

The basic rated load is
 kN

trends C:	2900
static state Co:	6000
Fatigue load limit	415
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	530
limit speed:	950
quality:	130

model

Column hole:	*239/500CA/W33
conical bore:	*239/500CAK/W33
	3

Dimensions are
 mm



d:	500
d ₂ ~ :	557
D1 ~ :	622
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	518
Da the max:	652
r _a the max:	4

Calculation coefficient

e:	0.17
----	------

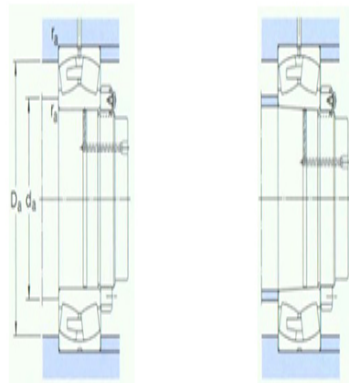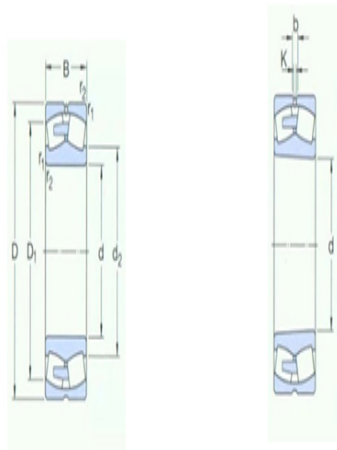

Y1:	4
Y2:	5.9
Y0:	4