



**Model: 230/500CA/W33**

Basic size of  
 mm

d:	500
D:	720
B:	167

The basic rated load is  
 kN

trends C:	4150
static state Co:	7800
Fatigue load limit	510
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	500
limit speed:	900
quality:	225

model

Column hole:	*230/500CA/W33
conical bore:	*230/500CAK/W33
	3

Dimensions are  
 mm



d:	500
d <sub>2</sub> ~ :	571
D1 ~ :	658
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	523
Da the max:	697
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.21
----	------

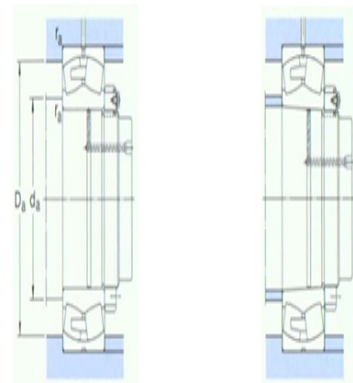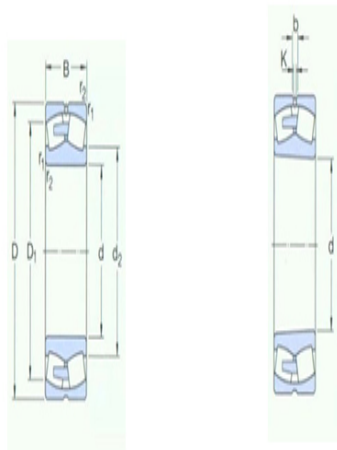

Y1:	3.2
Y2:	4.8
Y0:	3.2