



Model: 231/500CA/W33

Basic size of
 mm

d:	500
D:	830
B:	264

The basic rated load is
 kN

trends C:	7650
static state Co:	12900
Fatigue load limit	830
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	380
limit speed:	700
quality:	580

model

Column hole:	*231/500CA/W33
conical bore:	*231/500CAK/W33
	3

Dimensions are
 mm



d:	500
d ₂ ~ :	603
D1 ~ :	726
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	532
Da the max:	798
r _a the max:	6

Calculation coefficient

e:	0.3
----	-----

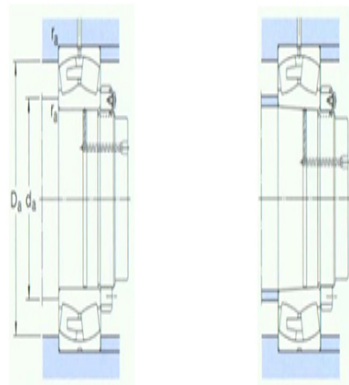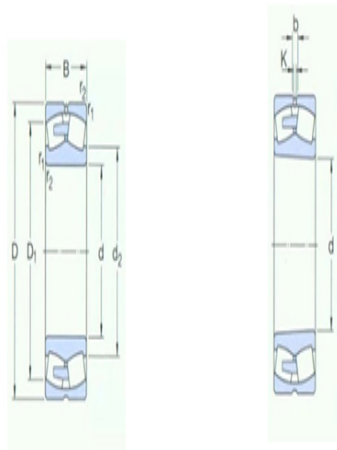

Y1:	2.3
Y2:	3.4
Y0:	2.2