



Model: 23988CCK/W33

Basic size of
 mm

d:	440
D:	600
B:	118

The basic rated load is
 kN

trends C:	2450
static state Co:	4900
Fatigue load limit Pu:	345

Rated rotation speed is
 r/min

Refer to the speed:	950
limit speed:	1000
quality:	99.5

model

Column hole:	*23988CC/W33
conical bore:	*23988CCK/W33

Dimensions are
 mm



d:	440
d ₂ ~ :	484
D1 ~ :	553
b:	16.7
k:	9
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	455
Da the max:	585
r _a the max:	3

Calculation coefficient

e:	0.16
Y1:	4.2

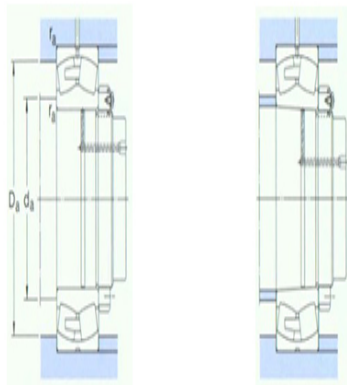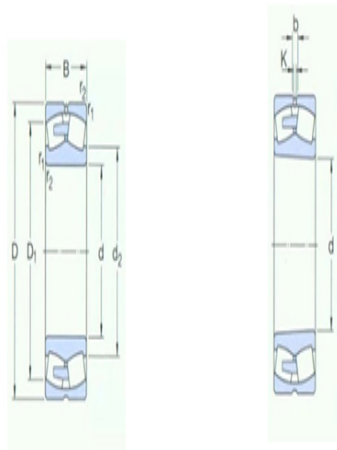

Y2:	6.3
Y0:	4