



Model: 23088CAK/W33

Basic size of
 mm

d:	440
D:	650
B:	157

The basic rated load is
 kN

trends C:	3650
static state Co:	6550
Fatigue load limit Pu:	450

Rated rotation speed is
 r/min

Refer to the speed:	560
limit speed:	1000
quality:	180

model

Column hole:	*23088CA/W33
conical bore:	*23088CAK/W33

Dimensions are
 mm



d:	440
d ₂ ~ :	509
D1 ~ :	590
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	463
Da the max:	627
r _a the max:	5

Calculation coefficient

e:	0.22
Y1:	3

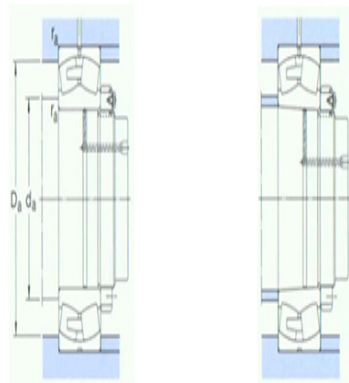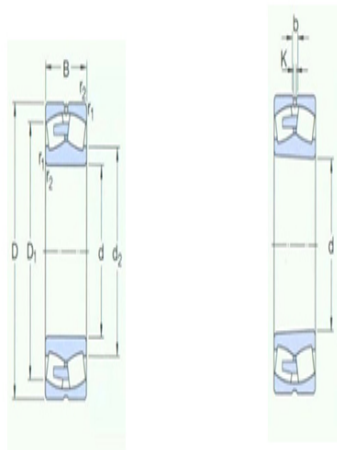

Y2:	4.6
Y0:	2.8