



Model: 24188ECAK30/W3

3

Basic size of  
mm

d:	440
D:	720
B:	280

The basic rated load is  
kN

trends C:	7500
static state Co:	13200
Fatigue load limit Pu:	900

Rated rotation speed is  
r/min

Refer to the speed:	400
limit speed:	700
quality:	460

model

Column hole:	*24188ECA/W33
conical bore:	*24188ECAK30/W3 3



Dimensions are  
mm

d:	440
d <sub>2</sub> ~ :	516
D1 ~ :	618
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	466
Da the max:	694
r <sub>a</sub> the max:	5

Calculation coefficient

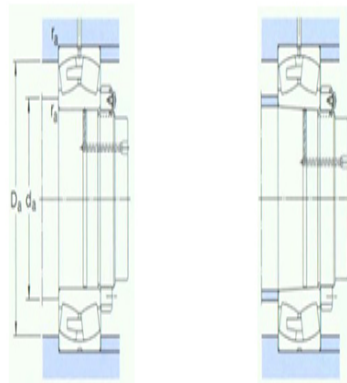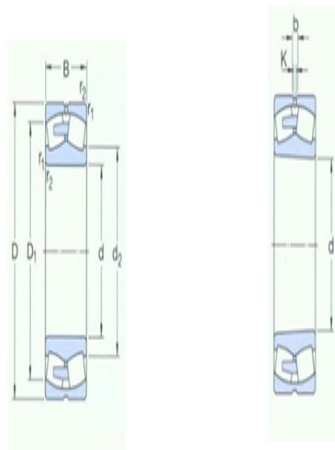

e: 0.37

Y1: 1.8

Y2: 2.7

Y0: 1.8