



Model: 23288CAK/W33

Basic size of
 mm

d:	440
D:	790
B:	280

The basic rated load is
 kN

trends C:	7800
static state Co:	12500
Fatigue load limit Pu:	800

Rated rotation speed is
 r/min

Refer to the speed:	430
limit speed:	600
quality:	590

model

Column hole:	*23288CA/W33
conical bore:	*23288CAK/W33

Dimensions are
 mm



d:	440
d ₂ ~ :	547
D1 ~ :	676
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	472
Da the max:	758
r _a the max:	6

Calculation coefficient

e:	0.35
Y1:	1.9

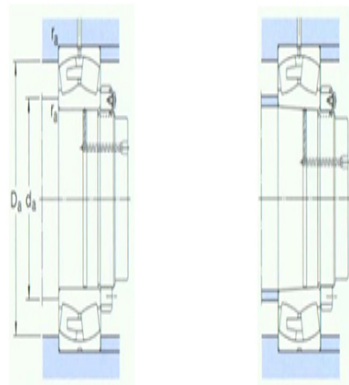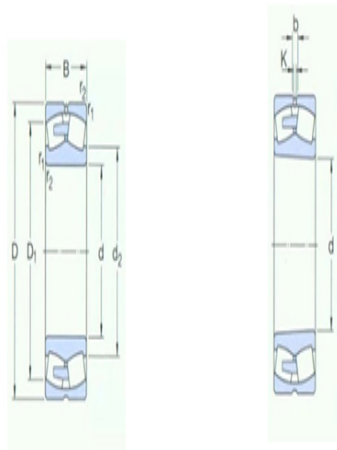

Y2:	2.9
Y0:	1.8