



Model: 24892CAK30MA/W2

0

Basic size of
mm

d:	460
D:	580
B:	118

The basic rated load is
kN

trends C:	1790
static state Co:	4900
Fatigue load limit	345
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	560
limit speed:	1100
quality:	75.5

model

Column hole:	24892CAMA/W20
conical bore:	24892CAK30MA/W2 0



Dimensions are
mm

d:	460
d ₂ ~ :	505
D1 ~ :	541
b:	-
k:	6
r _{1,2} the min:	3

Shoulder gear and chamfer size
mm

d _a the min:	473
Da the max:	567
r _a the max:	2.5

Calculation coefficient

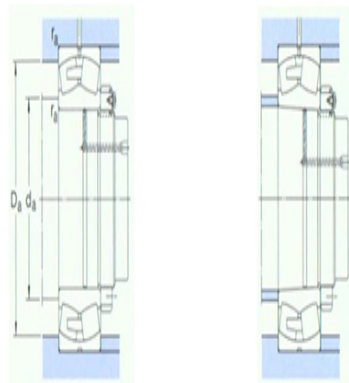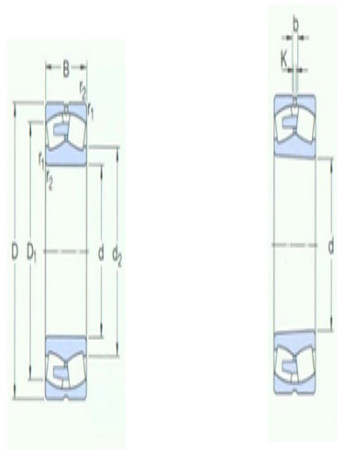

e:	0.17
Y1:	4
Y2:	5.9
Y0:	4