



**Model: 23992CAK/W33**

Basic size of  
mm

d:	460
D:	620
B:	118

The basic rated load is  
kN

trends C:	2500
static state Co:	5000
Fatigue load limit Pu:	355

Rated rotation speed is  
r/min

Refer to the speed:	600
limit speed:	1000
quality:	105

model

Column hole:	*23992CA/W33
conical bore:	*23992CAK/W33

Dimensions are  
mm



d:	460
d <sub>2</sub> ~ :	512
D1 ~ :	574
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	475
Da the max:	605
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.16
Y1:	4.2

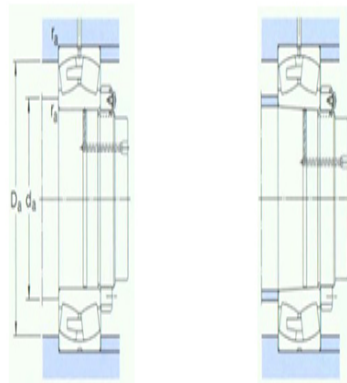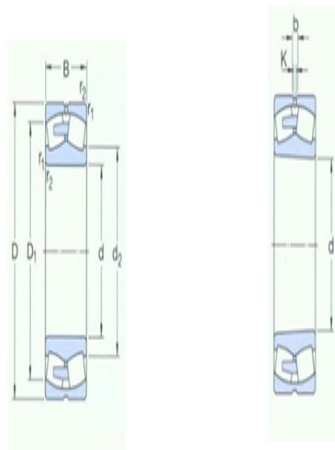

Y2:	6.3
Y0:	4