



Model: 23192CAK/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 460 |
| D: | 760 |
| B: | 240 |

The basic rated load is
 kN

| | |
|------------------------|-------|
| trends C: | 6400 |
| static state Co: | 10800 |
| Fatigue load limit Pu: | 680 |

Rated rotation speed is
 r/min

| | |
|---------------------|-----|
| Refer to the speed: | 430 |
| limit speed: | 800 |
| quality: | 440 |

model

| | |
|---------------|---------------|
| Column hole: | *23192CA/W33 |
| conical bore: | *23192CAK/W33 |

Dimensions are
 mm



| | |
|---------------------------|------|
| d: | 460 |
| d ₂ ~ : | 553 |
| D1 ~ : | 666 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 7.5 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 492 |
| Da the max: | 728 |
| r _a the max: | 6 |

Calculation coefficient

| | |
|-----|-----|
| e: | 0.3 |
| Y1: | 2.3 |

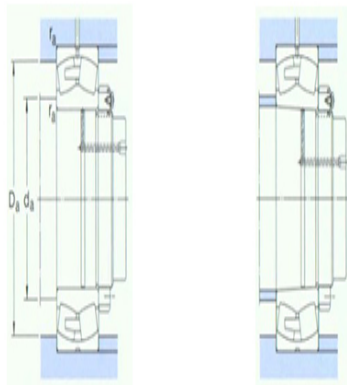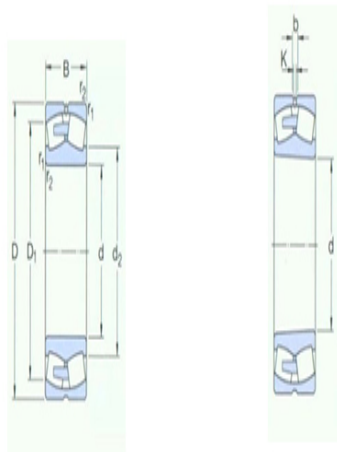

| | |
|-----|-----|
| Y2: | 3.4 |
| Y0: | 2.2 |