



Model: 24192ECAK30/W3

3

Basic size of
mm

d:	460
D:	760
B:	300

The basic rated load is
kN

trends C:	8300
static state Co:	14600
Fatigue load limit Pu:	1000

Rated rotation speed is
r/min

Refer to the speed:	360
limit speed:	670
quality:	560

model

Column hole:	*24192ECA/W33
conical bore:	*24192ECAK30/W3 3



Dimensions are
mm

d:	460
d ₂ ~ :	544
D1 ~ :	649
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	492
Da the max:	728
r _a the max:	6

Calculation coefficient

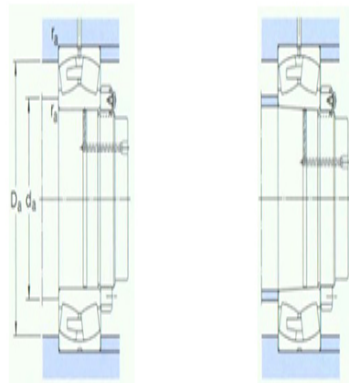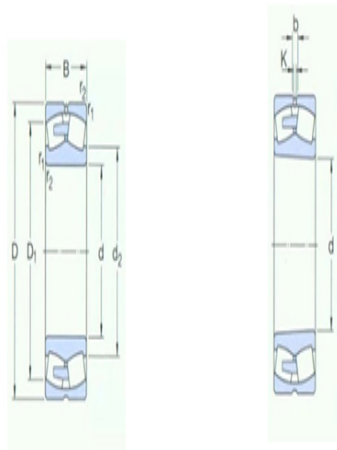

e: 0.37

Y1: 1.8

Y2: 2.7

Y0: 1.8