



Model: 23292CAK/W33

Basic size of
mm

d:	460
D:	830
B:	296

The basic rated load is
kN

trends C:	8500
static state Co:	13700
Fatigue load limit Pu:	880

Rated rotation speed is
r/min

Refer to the speed:	400
limit speed:	560
quality:	695

model

Column hole:	*23292CA/W33
conical bore:	*23292CAK/W33

Dimensions are
mm



d:	460
d ₂ ~ :	572
D1 ~ :	706
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	492
Da the max:	798
r _a the max:	6

Calculation coefficient

e:	0.35
Y1:	1.9

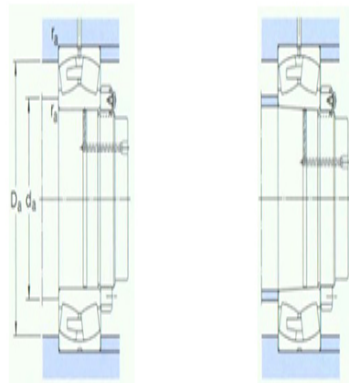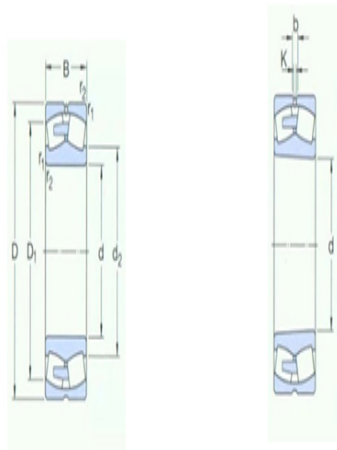

Y2:	2.9
Y0:	1.8