



Model: 23996CAK/W33

Basic size of
 mm

d:	480
D:	650
B:	128

The basic rated load is
 kN

trends C:	2900
static state Co:	5700
Fatigue load limit Pu:	405

Rated rotation speed is
 r/min

Refer to the speed:	560
limit speed:	1000
quality:	125

model

Column hole:	*23996CA/W33
conical bore:	*23996CAK/W33

Dimensions are
 mm



d:	480
d ₂ ~ :	532
D1 ~ :	602
b:	16.7
k:	9
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	498
Da the max:	632
r _a the max:	4

Calculation coefficient

e:	0.18
Y1:	3.8

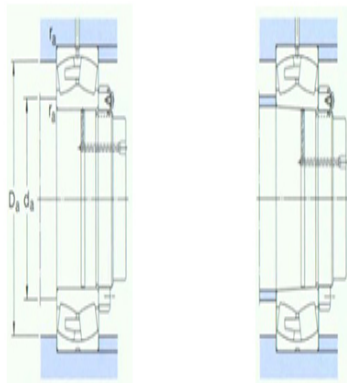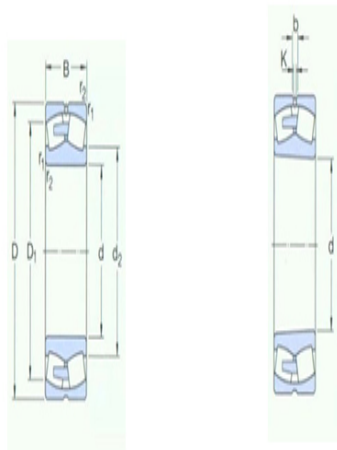

Y2:	5.6
Y0:	3.6