



**Model: 23196CAK/W33**

Basic size of  
 mm

d:	480
D:	790
B:	248

The basic rated load is  
 kN

trends C:	6950
static state Co:	12000
Fatigue load limit Pu:	780

Rated rotation speed is  
 r/min

Refer to the speed:	400
limit speed:	750
quality:	485

model

Column hole:	*23196CA/W33
conical bore:	*23196CAK/W33

Dimensions are  
 mm



d:	480
d <sub>2</sub> ~ :	577
D1 ~ :	692
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	512
Da the max:	758
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.3
Y1:	2.3

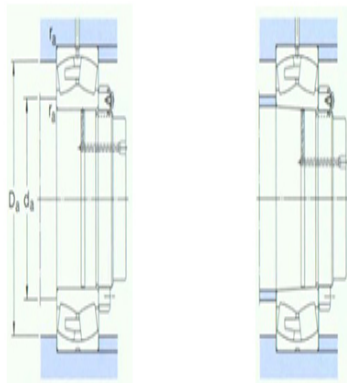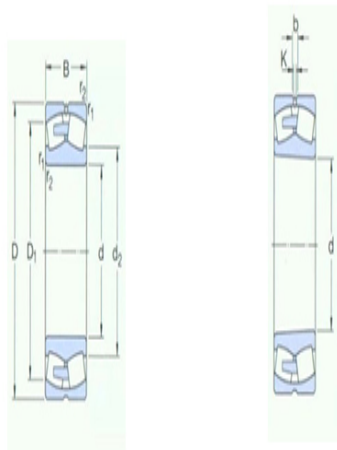

Y2:	3.4
Y0:	2.2