



**Model: 23296CAK/W33**

Basic size of  
mm

d:	480
D:	870
B:	310

The basic rated load is  
kN

trends C:	9300
static state Co:	15000
Fatigue load limit Pu:	950

Rated rotation speed is  
r/min

Refer to the speed:	380
limit speed:	530
quality:	800

model

Column hole:	*23296CA/W33
conical bore:	*23296CAK/W33

Dimensions are  
mm



d:	480
d <sub>2</sub> ~ :	600
D1 ~ :	741
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	512
Da the max:	838
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.35
Y1:	1.9

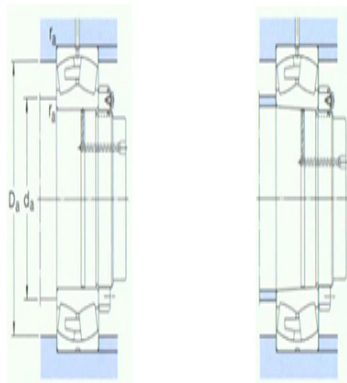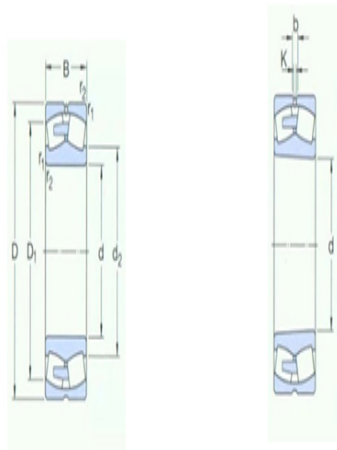

Y2:	2.9
Y0:	1.8