



**Model: 239/500CAK/W33**

Basic size of  
 mm

d:	500
D:	670
B:	128

The basic rated load is  
 kN

trends C:	2900
static state Co:	6000
Fatigue load limit	415
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	530
limit speed:	950
quality:	130

model

Column hole:	*239/500CA/W33
conical bore:	*239/500CAK/W33
	3

Dimensions are  
 mm



d:	500
d <sub>2</sub> ~ :	557
D1 ~ :	622
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	518
Da the max:	652
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.17
----	------

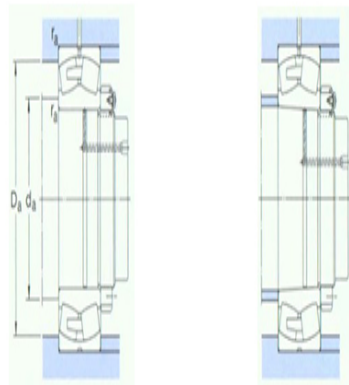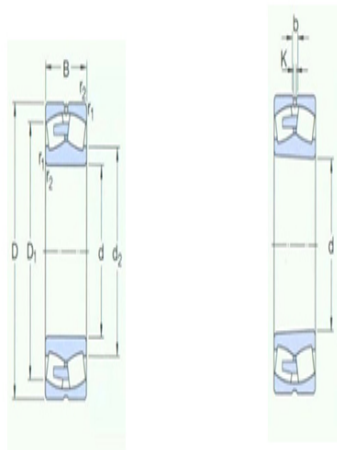

Y1:	4
Y2:	5.9
Y0:	4