



**Model: 232/500CAK/W33**

Basic size of  
 mm

d:	500
D:	920
B:	336

The basic rated load is  
 kN

trends C:	10600
static state Co:	17300
Fatigue load limit	1060
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	360
limit speed:	500
quality:	985

model

Column hole:	*232/500CA/W33
conical bore:	*232/500CAK/W33
	3

Dimensions are  
 mm



d:	500
d <sub>2</sub> ~ :	631
D1 ~ :	779
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	532
Da the max:	888
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.35
----	------

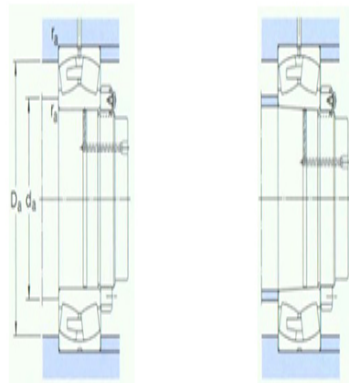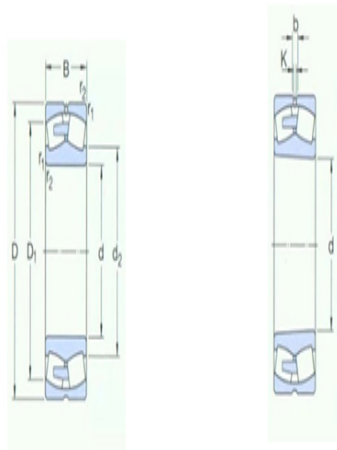

Y1:	1.9
Y2:	2.9
Y0:	1.8