



Model: 248/530CAMA/W2

0

Basic size of
mm

d:	530
D:	650
B:	118

The basic rated load is
kN

trends C:	1840
static state Co:	5300
Fatigue load limit Pu:	380

Rated rotation speed is
r/min

Refer to the speed:	480
limit speed:	950
quality:	86

model


Column hole:	248/530CAMA/W20
conical bore:	248/530CAK30MA/W2 0

Dimensions are
mm

d:	530
d ₂ ~ :	573
D1 ~ :	612
b:	-
k:	7.5
r _{1,2} the min:	3

Shoulder gear and chamfer size
mm

d _a the min:	543
----------------------------	-----

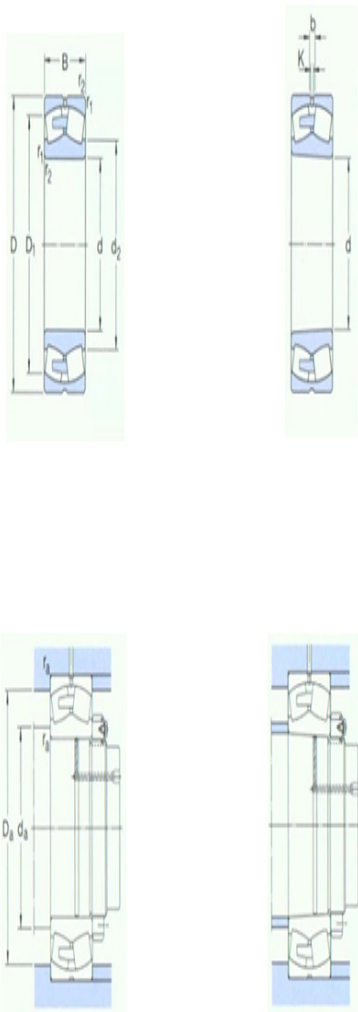

Da the max:	637
r_a the max:	2.5

Calculation coefficient

e:	0.15
Y1:	4.5
Y2:	6.7
Y0:	4.5