



Model: 241/530ECA/W33

Basic size of
 mm

d:	530
D:	870
B:	335

The basic rated load is
 kN

trends C:	10600
static state Co:	19000
Fatigue load limit Pu:	1220

Rated rotation speed is
 r/min

Refer to the speed:	300
limit speed:	560
quality:	830

model


Column hole:	*241/530ECA/W33
conical bore:	*241/530ECAK30/W3 3

Dimensions are
 mm

d:	530
d ₂ ~ :	623
D1 ~ :	748
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	562
Da the max:	838
r _a the max:	6

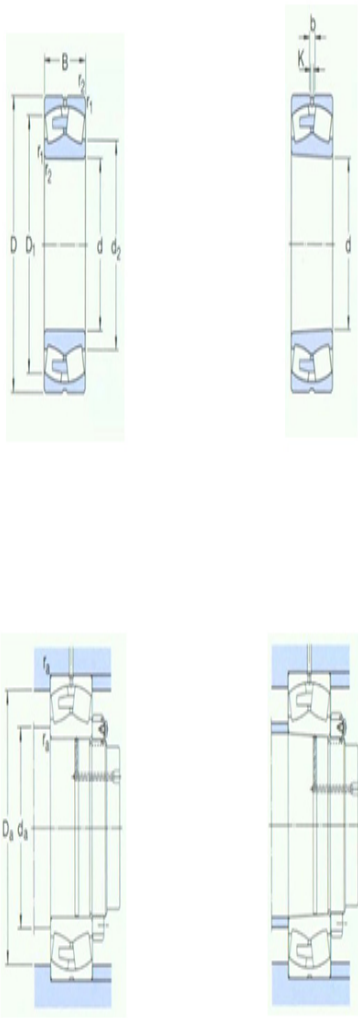

Calculation coefficient

e:	0.37
Y1:	1.8
Y2:	2.7
Y0:	1.8