



Model: 232/530CA/W33

Basic size of
 mm

d:	530
D:	980
B:	355

The basic rated load is
 kN

trends C:	11100
static state Co:	20400
Fatigue load limit Pu:	1220

Rated rotation speed is
 r/min

Refer to the speed:	300
limit speed:	480
quality:	1200

model

Column hole:	232/530CA/W33
conical bore:	232/530CAK/W33

Dimensions are
 mm


d:	530
d ₂ ~ :	668
D1 ~ :	836
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
 mm

d _a the min:	570
Da the max:	940
r _a the max:	8

Calculation coefficient

e:	0.35
Y1:	1.9

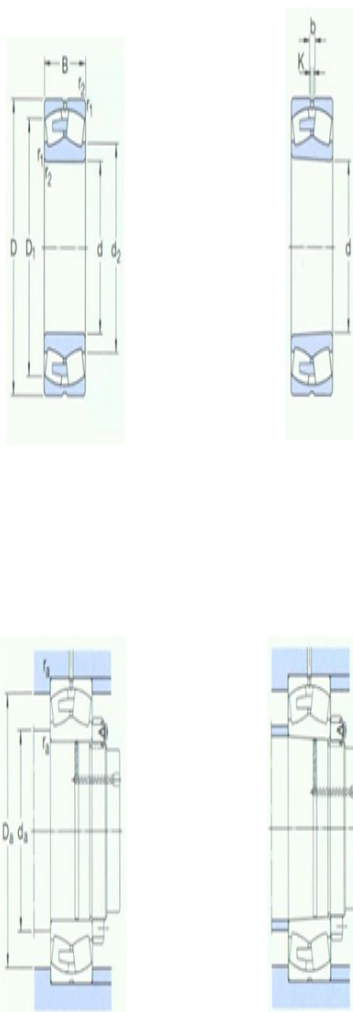

Y2:	2.9
Y0:	1.8