



**Model: 230/560CA/W33**

Basic size of  
mm

d:	560
D:	820
B:	195

The basic rated load is  
kN

trends C:	5600
static state Co:	10200
Fatigue load limit	680
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	430
limit speed:	750
quality:	355

model

Column hole:	*230/560CA/W33
conical bore:	*230/560CAK/W33
	3

Dimensions are  
mm


d:	560
d <sub>2</sub> ~ :	644
D1 ~ :	746
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	583
Da the max:	797
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.22
----	------

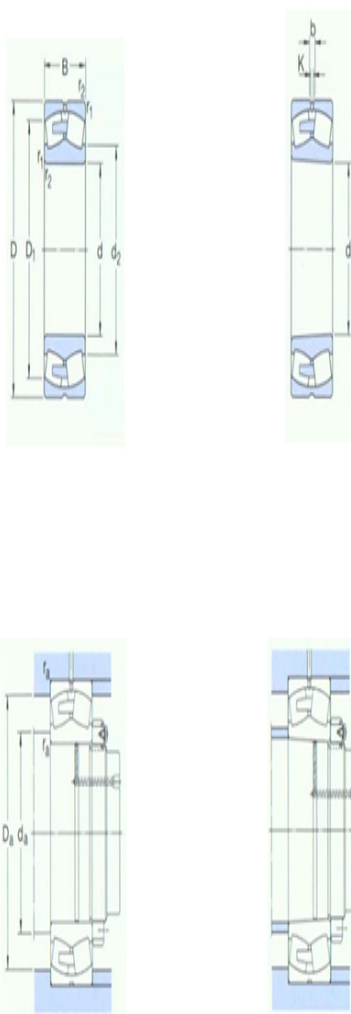

Y1:	3
Y2:	4.6
Y0:	2.8