



Model: 240/560ECA/W33

Basic size of
mm

d:	560
D:	820
B:	258

The basic rated load is
kN

trends C:	7350
static state Co:	14600
Fatigue load limit Pu:	960

Rated rotation speed is
r/min

Refer to the speed:	380
limit speed:	630
quality:	465

model


Column hole:	*240/560ECA/W33
conical bore:	*240/560ECAK30/W3 3

Dimensions are
mm

d:	560
d ₂ ~ :	635
D1 ~ :	728
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	583
Da the max:	797
r _a the max:	5

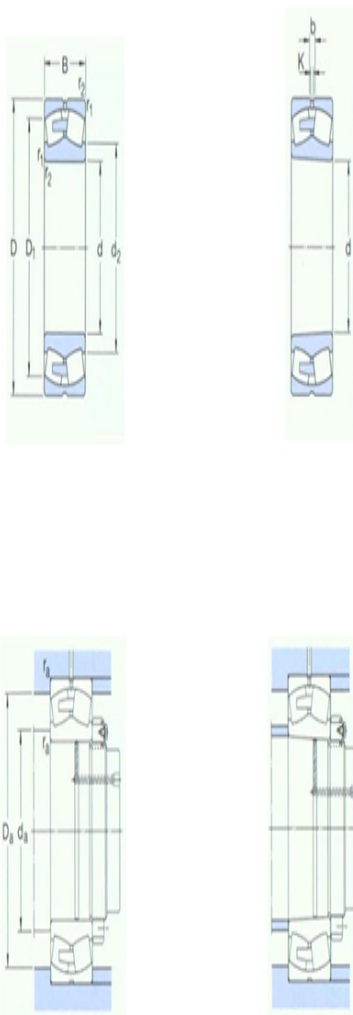

Calculation coefficient

e:	0.28
Y1:	2.4
Y2:	3.6
Y0:	2.5