



**Model: 232/560CA/W33**

Basic size of  
 mm

d:	560
D:	1030
B:	365

The basic rated load is  
 kN

trends C:	11500
static state Co:	22000
Fatigue load limit Pu:	1400

Rated rotation speed is  
 r/min

Refer to the speed:	280
limit speed:	430
quality:	1350

model

Column hole:	232/560CA/W33
conical bore:	232/560CAK/W33

Dimensions are  
 mm


d:	560
d <sub>2</sub> ~ :	704
D1 ~ :	878
b:	22.3
k:	12
r <sub>1,2</sub> the min:	9.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	600
Da the max:	990
r <sub>a</sub> the max:	8

Calculation coefficient

e:	0.35
Y1:	1.9

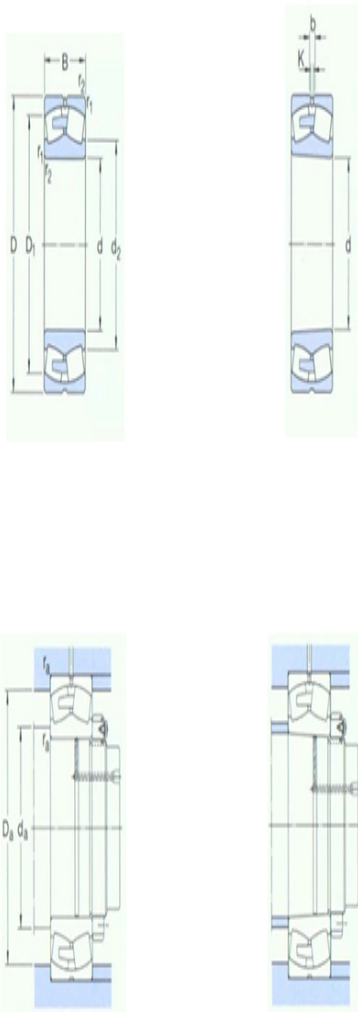

Y2:	2.9
Y0:	1.8