



**Model: 230/600CA/W33**

Basic size of  
mm

d:	600
D:	870
B:	200

The basic rated load is  
kN

trends C:	6000
static state Co:	11400
Fatigue load limit	750
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	400
limit speed:	700
quality:	405

model

Column hole:	*230/600CA/W33
conical bore:	*230/600CAK/W33
	3

Dimensions are  
mm


d:	600
d <sub>2</sub> ~ :	683
D1 ~ :	789
b:	22.3
k:	12
r <sub>1,2</sub> the min:	6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	623
Da the max:	847
r <sub>a</sub> the max:	5

Calculation coefficient

e:	0.22
----	------

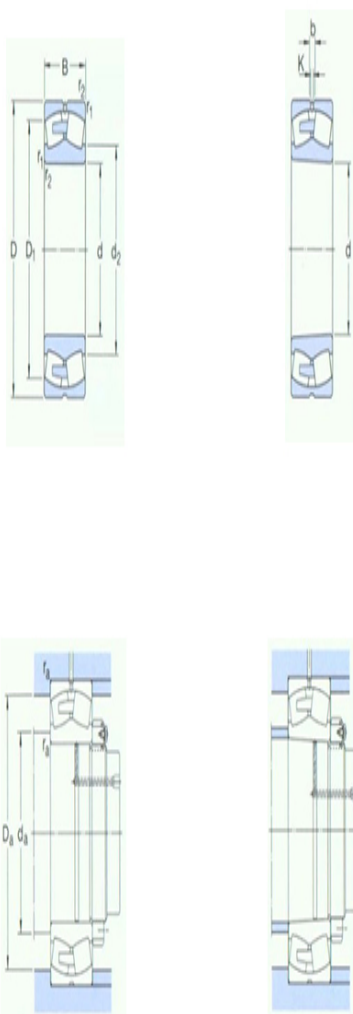

Y1:	3
Y2:	4.6
Y0:	2.8