



Model: 240/600ECA/W33

Basic size of
mm

d:	600
D:	870
B:	272

The basic rated load is
kN

trends C:	8150
static state Co:	17000
Fatigue load limit Pu:	1100

Rated rotation speed is
r/min

Refer to the speed:	340
limit speed:	560
quality:	520

model


Column hole:	*240/600ECA/W33
conical bore:	*240/600ECAK30/W3 3

Dimensions are
mm

d:	600
d ₂ ~ :	675
D1 ~ :	774
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	623
Da the max:	847
r _a the max:	5

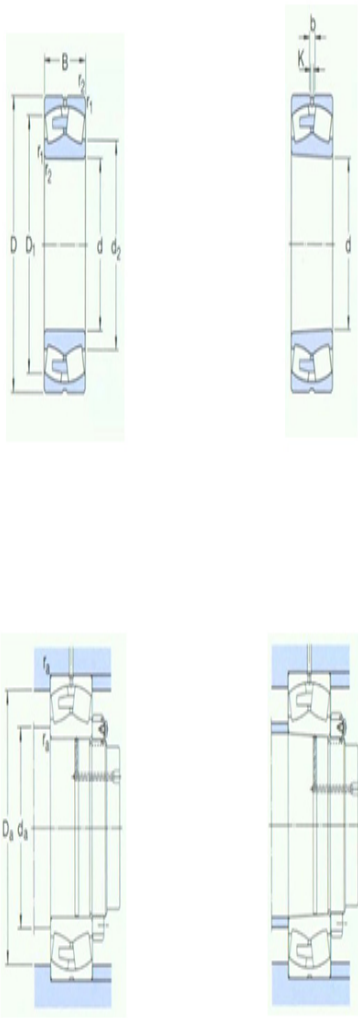

Calculation coefficient

e:	0.3
Y1:	2.3
Y2:	3.4
Y0:	2.2