



**Model: 241/600ECA/W33**

Basic size of  
 mm

d:	600
D:	980
B:	375

The basic rated load is  
 kN

trends C:	11500
static state Co:	23600
Fatigue load limit Pu:	1460

Rated rotation speed is  
 r/min

Refer to the speed:	240
limit speed:	480
quality:	1200

model

Column hole:	241/600ECA/W33
conical bore:	241/600ECAK30/W3 3


Dimensions are  
 mm

d:	600
d <sub>2</sub> ~ :	702
D1 ~ :	845
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	632
Da the max:	948
r <sub>a</sub> the max:	6

Calculation coefficient

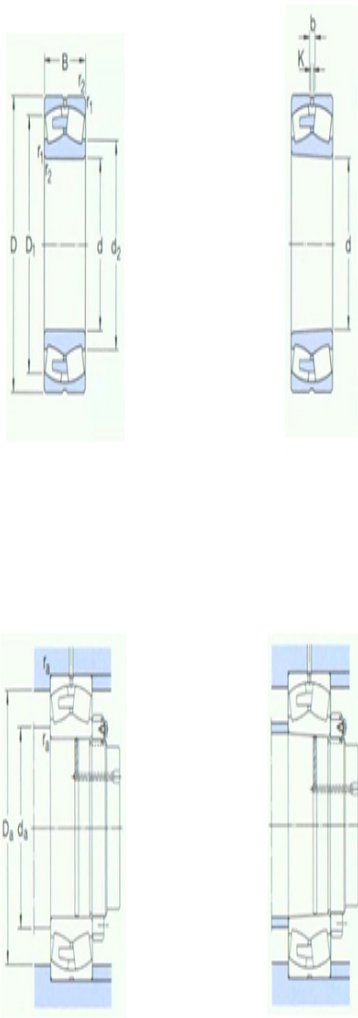

e: 0.37

Y1: 1.8

Y2: 2.7

Y0: 1.8