



Model: 239/530CAK/W33

Basic size of
 mm

d:	530
D:	710
B:	136

The basic rated load is
 kN

trends C:	3200
static state Co:	6700
Fatigue load limit	480
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	500
limit speed:	900
quality:	155

model

Column hole:	*239/530CA/W33
conical bore:	*239/530CAK/W33
	3

Dimensions are
 mm


d:	530
d ₂ ~ :	589
D1 ~ :	661
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	548
Da the max:	692
r _a the max:	4

Calculation coefficient

e:	0.17
----	------

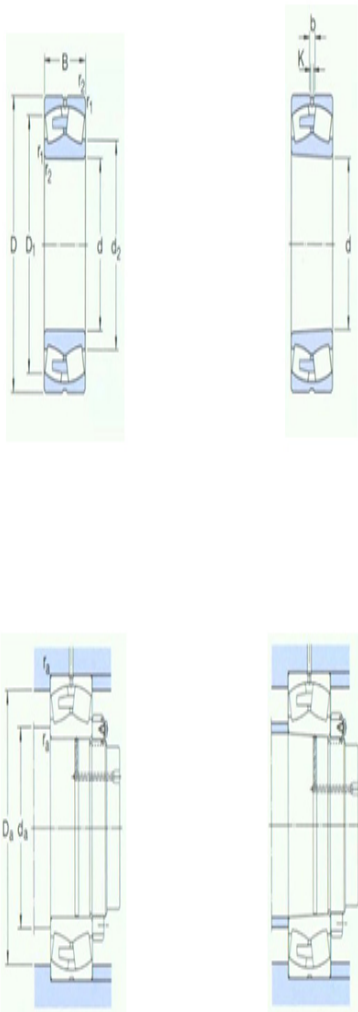

Y1:	4
Y2:	5.9
Y0:	4