



Model: 230/530CAK/W33

Basic size of
 mm

d:	530
D:	780
B:	185

The basic rated load is
 kN

trends C:	5100
static state Co:	9300
Fatigue load limit	630
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	450
limit speed:	800
quality:	310

model

Column hole:	*230/530CA/W33
conical bore:	*230/530CAK/W33
	3

Dimensions are
 mm


d:	530
d ₂ ~ :	611
D1 ~ :	710
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	553
Da the max:	757
r _a the max:	5

Calculation coefficient

e:	0.22
----	------

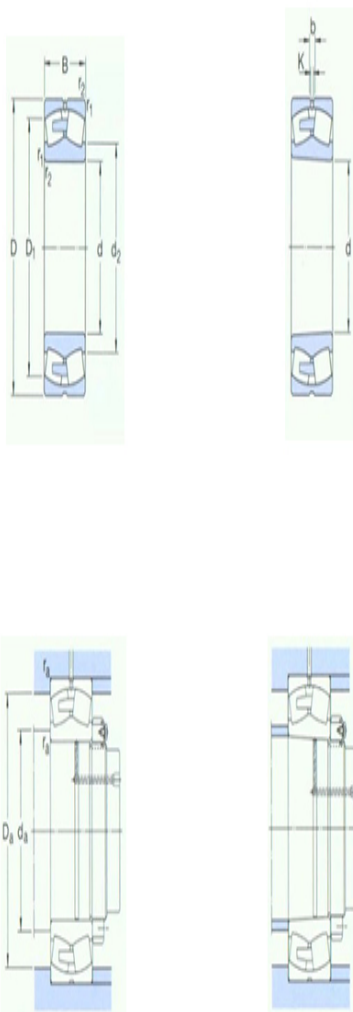

Y1:	3
Y2:	4.6
Y0:	2.8