



Model: 240/530ECAK30/W3

3

Basic size of
mm

d:	530
D:	780
B:	250

The basic rated load is
kN

trends C:	6700
static state Co:	13200
Fatigue load limit	830
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	400
limit speed:	670
quality:	410

model

Column hole:	*240/530ECA/W33
conical bore:	*240/530ECAK30/W3 3


Dimensions are
mm

d:	530
d ₂ ~ :	600
D1 ~ :	687
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
mm

d _a the min:	553
Da the max:	757
r _a the max:	5

Calculation coefficient

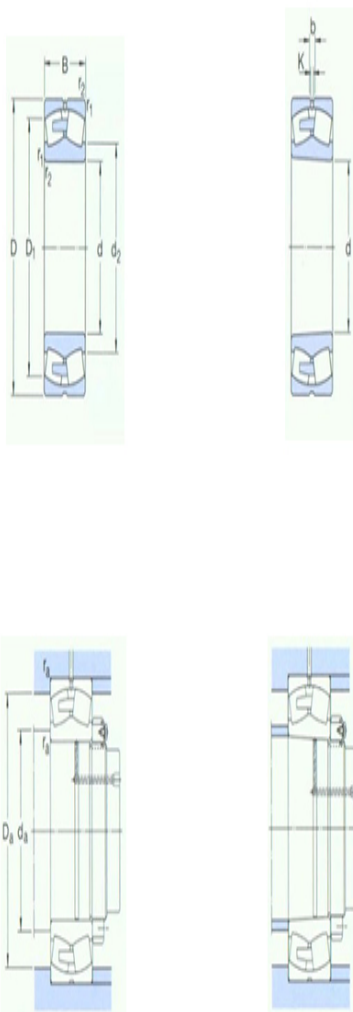

e:	0.28
Y1:	2.4
Y2:	3.6
Y0:	2.5