



**Model: 231/530CAK/W33**

Basic size of  
 mm

d:	530
D:	870
B:	272

The basic rated load is  
 kN

trends C:	8150
static state Co:	14000
Fatigue load limit	915
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	360
limit speed:	670
quality:	645

model

Column hole:	*231/530CA/W33
conical bore:	*231/530CAK/W33
	3

Dimensions are  
 mm


d:	530
d <sub>2</sub> ~ :	636
D1 ~ :	763
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	562
Da the max:	838
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.3
----	-----

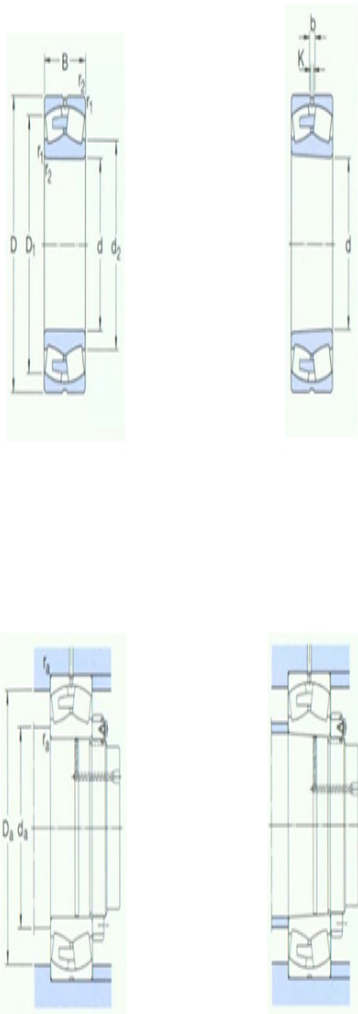

Y1:	2.3
Y2:	3.4
Y0:	2.2