



**Model: 232/530CAK/W33**

Basic size of  
mm

d:	530
D:	980
B:	355

The basic rated load is  
kN

trends C:	11100
static state Co:	20400
Fatigue load limit Pu:	1220

Rated rotation speed is  
r/min

Refer to the speed:	300
limit speed:	480
quality:	1200

model

Column hole:	232/530CA/W33
conical bore:	232/530CAK/W33

Dimensions are  
mm


d:	530
d <sub>2</sub> ~ :	668
D1 ~ :	836
b:	22.3
k:	12
r <sub>1,2</sub> the min:	9.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	570
Da the max:	940
r <sub>a</sub> the max:	8

Calculation coefficient

e:	0.35
Y1:	1.9

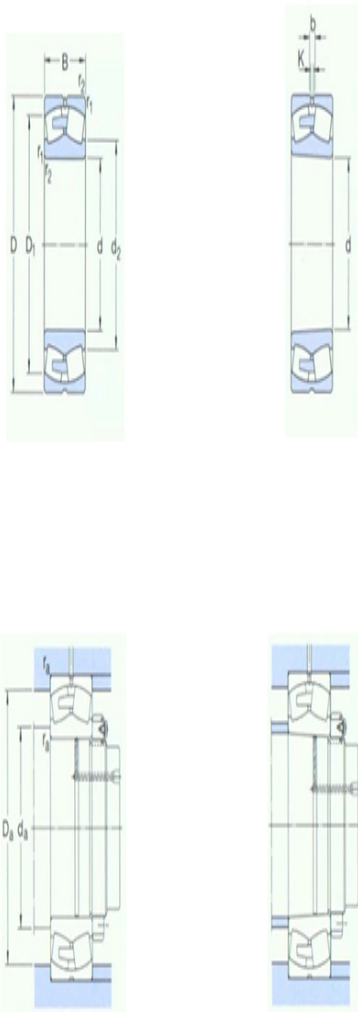

Y2:	2.9
Y0:	1.8