



Model: 231/560CAK/W33

Basic size of
mm

| | |
|----|-----|
| d: | 560 |
| D: | 920 |
| B: | 280 |

The basic rated load is
kN

| | |
|-----------------------|-------|
| trends C: | 9150 |
| static state Co: | 16000 |
| Fatigue load limit | 980 |
| Pu: | |

Rated rotation speed is
r/min

| | |
|------------------------|-----|
| Refer to the speed: | 340 |
| limit speed: | 630 |
| quality: | 740 |

model

| | |
|---------------|-----------------|
| Column hole: | *231/560CA/W33 |
| conical bore: | *231/560CAK/W33 |
| | 3 |

Dimensions are
mm


| | |
|---------------------------|------|
| d: | 560 |
| d ₂ ~ : | 673 |
| D1 ~ : | 809 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 7.5 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 592 |
| Da the max: | 888 |
| r _a the max: | 6 |

Calculation coefficient

| | |
|----|-----|
| e: | 0.3 |
|----|-----|

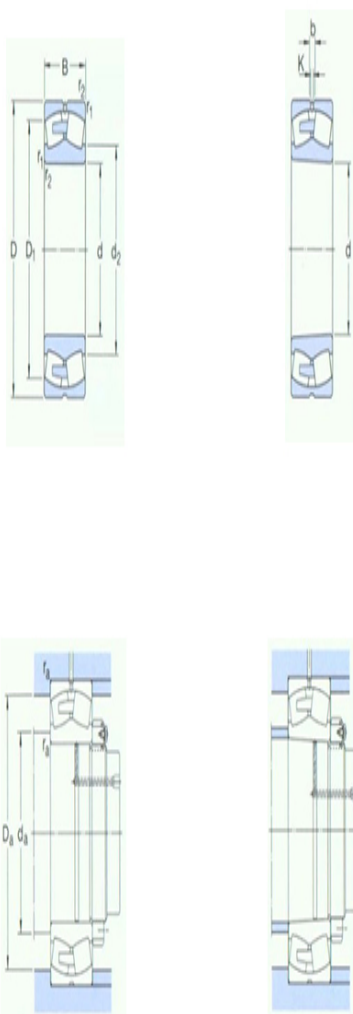

| | |
|-----|-----|
| Y1: | 2.3 |
| Y2: | 3.4 |
| Y0: | 2.2 |