



Model: 232/560CAK/W33

Basic size of
mm

d:	560
D:	1030
B:	365

The basic rated load is
kN

trends C:	11500
static state Co:	22000
Fatigue load limit Pu:	1400

Rated rotation speed is
r/min

Refer to the speed:	280
limit speed:	430
quality:	1350

model

Column hole:	232/560CA/W33
conical bore:	232/560CAK/W33

Dimensions are
mm


d:	560
d ₂ ~ :	704
D1 ~ :	878
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
mm

d _a the min:	600
Da the max:	990
r _a the max:	8

Calculation coefficient

e:	0.35
Y1:	1.9

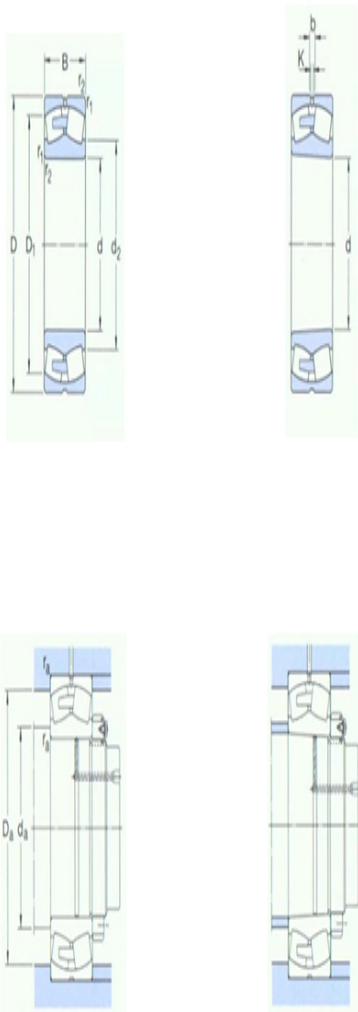

Y2:	2.9
Y0:	1.8