



Model: 239/600CAK/W33

Basic size of
 mm

d:	600
D:	800
B:	150

The basic rated load is
 kN

trends C:	3900
static state Co:	8300
Fatigue load limit	585
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	430
limit speed:	750
quality:	220

model

Column hole:	*239/600CA/W33
conical bore:	*239/600CAK/W33
	3

Dimensions are
 mm


d:	600
d ₂ ~ :	668
D1 ~ :	744
b:	22.3
k:	12
r _{1,2} the min:	5

Shoulder gear and chamfer size
 mm

d _a the min:	618
Da the max:	782
r _a the max:	4

Calculation coefficient

e:	0.17
----	------

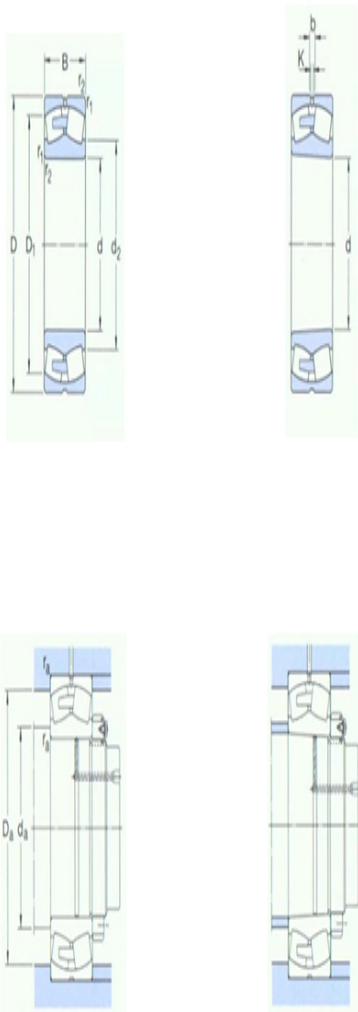

Y1:	4
Y2:	5.9
Y0:	4