



Model: 230/600CAK/W33

Basic size of
 mm

d:	600
D:	870
B:	200

The basic rated load is
 kN

trends C:	6000
static state Co:	11400
Fatigue load limit	750
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	400
limit speed:	700
quality:	405

model

Column hole:	*230/600CA/W33
conical bore:	*230/600CAK/W33
	3

Dimensions are
 mm


d:	600
d ₂ ~ :	683
D1 ~ :	789
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	623
Da the max:	847
r _a the max:	5

Calculation coefficient

e:	0.22
----	------

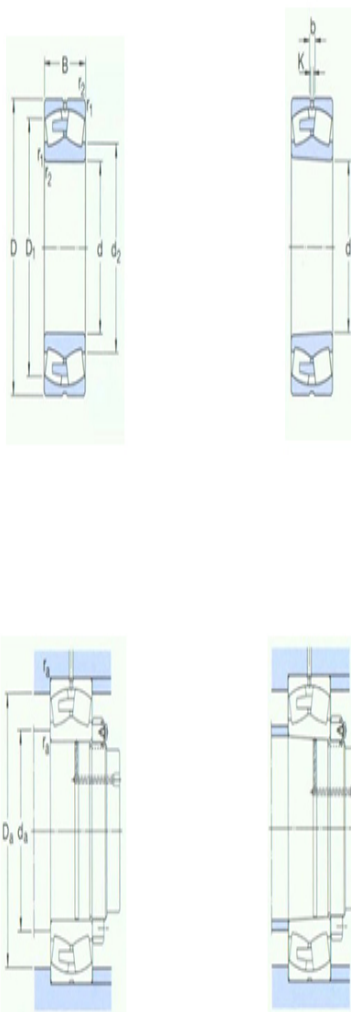

Y1:	3
Y2:	4.6
Y0:	2.8