



Model: 231/600CAK/W33

Basic size of
 mm

d:	600
D:	980
B:	300

The basic rated load is
 kN

trends C:	10200
static state Co:	18000
Fatigue load limit	1100
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	320
limit speed:	560
quality:	895

model

Column hole:	*231/600CA/W33
conical bore:	*231/600CAK/W33
	3

Dimensions are
 mm


d:	600
d ₂ ~ :	720
D1 ~ :	863
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	632
Da the max:	948
r _a the max:	6

Calculation coefficient

e:	0.3
----	-----

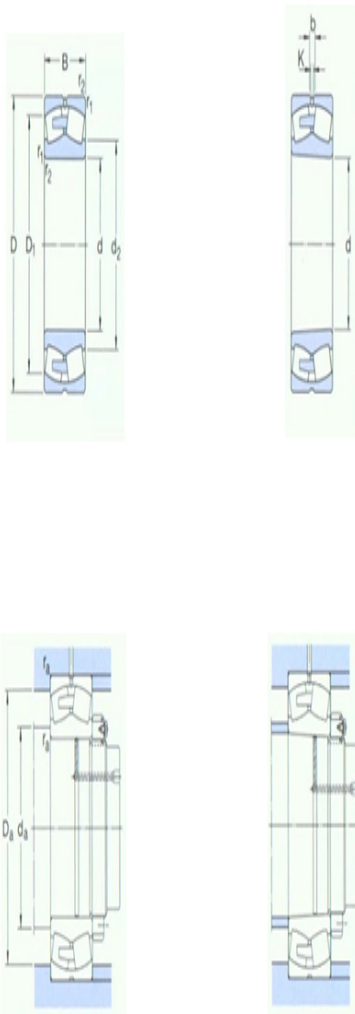

Y1:	2.3
Y2:	3.4
Y0:	2.2