



Model: 241/600ECAK30/W3

3

Basic size of
mm

d:	600
D:	980
B:	375

The basic rated load is
kN

trends C:	11500
static state Co:	23600
Fatigue load limit	1460
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	240
limit speed:	480
quality:	1200

model

Column hole:	241/600ECA/W33
conical bore:	241/600ECAK30/W3 3


Dimensions are
mm

d:	600
d ₂ ~ :	702
D1 ~ :	845
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	632
Da the max:	948
r _a the max:	6

Calculation coefficient

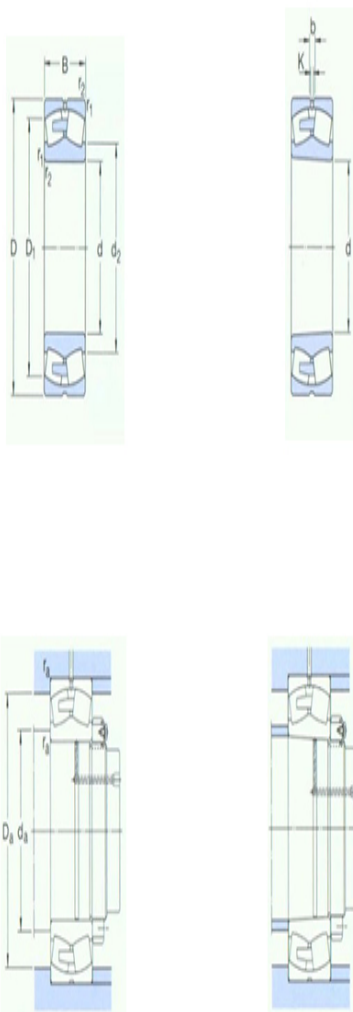

e:	0.37
Y1:	1.8
Y2:	2.7
Y0:	1.8