



Model: 232/600CAK/W33

Basic size of
 mm

d:	600
D:	1090
B:	388

The basic rated load is
 kN

trends C:	13100
static state Co:	25500
Fatigue load limit Pu:	1560

Rated rotation speed is
 r/min

Refer to the speed:	260
limit speed:	400
quality:	1600

model

Column hole:	232/600CA/W33
conical bore:	232/600CAK/W33

Dimensions are
 mm


d:	600
d ₂ ~ :	752
D1 ~ :	929
b:	22.3
k:	12
r _{1,2} the min:	9.5

Shoulder gear and chamfer size
 mm

d _a the min:	640
Da the max:	1050
r _a the max:	8

Calculation coefficient

e:	0.35
Y1:	1.9

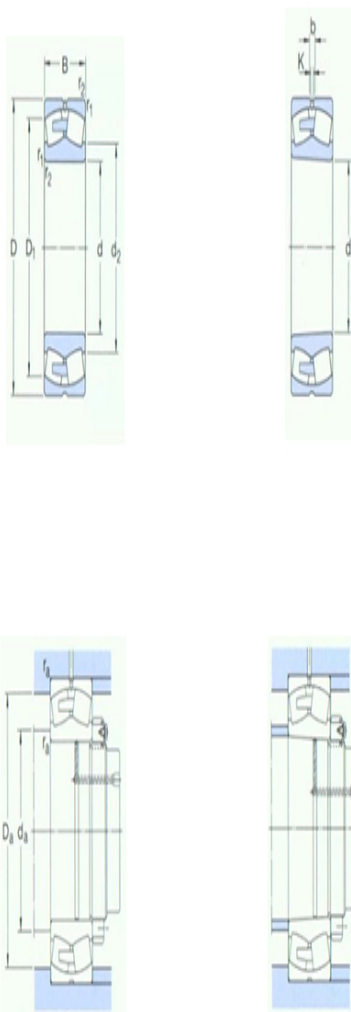

Y2:	2.9
Y0:	1.8