



Model: 238/630CAKMA/W2

0

Basic size of  
mm

d:	630
D:	780
B:	112

The basic rated load is  
kN

trends C:	2190
static state Co:	6100
Fatigue load limit	415
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	400
limit speed:	750
quality:	120

model

Column hole:	238/630CAMA/W20
conical bore:	238/630CAKMA/W20


Dimensions are  
mm

d:	630
d <sub>2</sub> ~ :	681
D1 ~ :	738
b:	-
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	645
Da the max:	765
r <sub>a</sub> the max:	3

Calculation coefficient

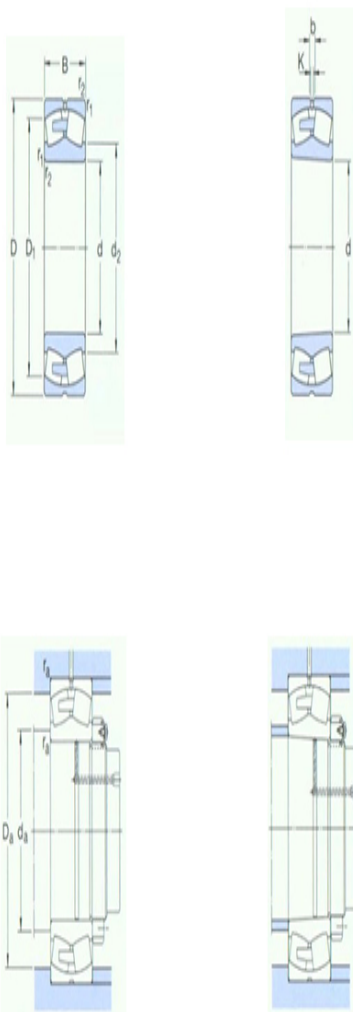

e:	0.12
Y1:	5.6
Y2:	8.4
Y0:	5.6