



Model: 239/630CAK/W33

Basic size of
 mm

d:	630
D:	850
B:	165

The basic rated load is
 kN

trends C:	4650
static state Co:	9800
Fatigue load limit	640
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	400
limit speed:	700
quality:	280

model

Column hole:	*239/630CA/W33
conical bore:	*239/630CAK/W33
	3

Dimensions are
 mm


d:	630
d ₂ ~ :	705
D1 ~ :	787
b:	22.3
k:	12
r _{1,2} the min:	6

Shoulder gear and chamfer size
 mm

d _a the min:	653
Da the max:	827
r _a the max:	5

Calculation coefficient

e:	0.17
----	------

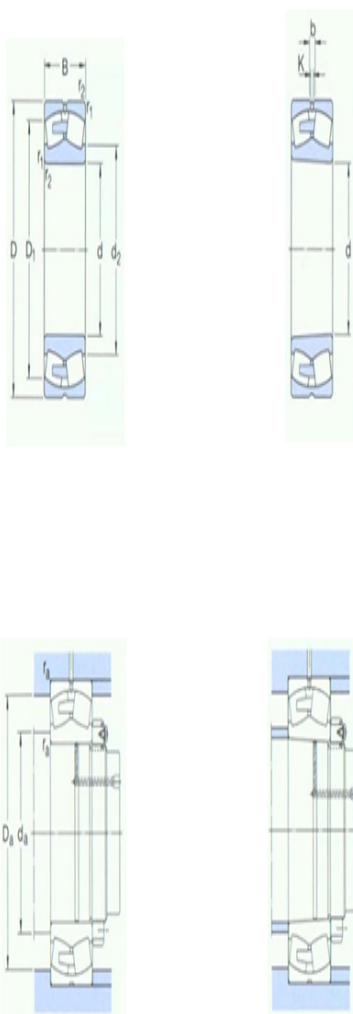

Y1:	4
Y2:	5.9
Y0:	4