



**Model: 230/630CAK/W33**

Basic size of  
mm

d:	630
D:	920
B:	212

The basic rated load is  
kN

trends C:	6700
static state Co:	12500
Fatigue load limit	800
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	380
limit speed:	670
quality:	485

model

Column hole:	*230/630CA/W33
conical bore:	*230/630CAK/W33
	3

Dimensions are  
mm


d:	630
d <sub>2</sub> ~ :	725
D1 ~ :	839
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	658
Da the max:	892
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.21
----	------

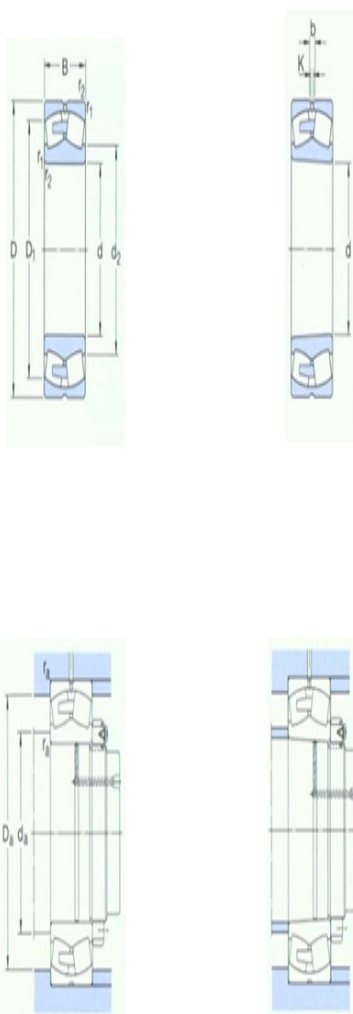

Y1:	3.2
Y2:	4.8
Y0:	3.2