



Model: 231/630CAK/W33

Basic size of
mm

d:	630
D:	1030
B:	315

The basic rated load is
kN

trends C:	10500
static state Co:	20800
Fatigue load limit Pu:	1220

Rated rotation speed is
r/min

Refer to the speed:	260
limit speed:	530
quality:	1050

model

Column hole:	231/630CA/W33
conical bore:	231/630CAK/W33

Dimensions are
mm


d:	630
d ₂ ~ :	755
D1 ~ :	918
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
mm

d _a the min:	662
Da the max:	998
r _a the max:	6

Calculation coefficient

e:	0.3
Y1:	2.3

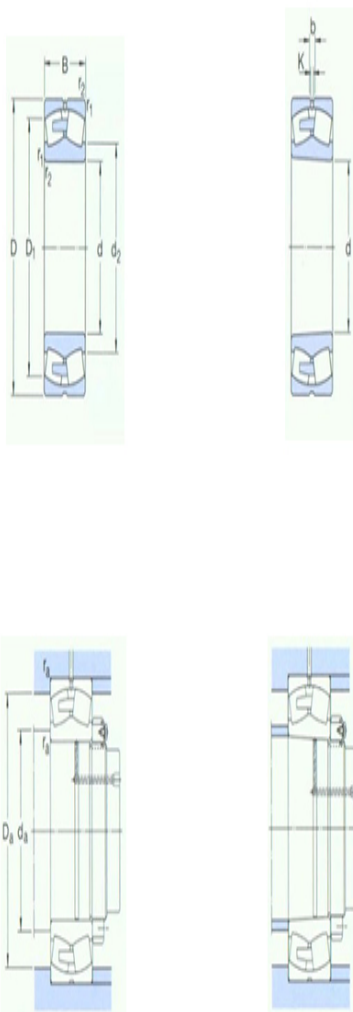

Y2:	3.4
Y0:	2.2