



**Model: 230/670CA/W33**

Basic size of  
 mm

d:	670
D:	980
B:	230

The basic rated load is  
 kN

trends C:	7650
static state Co:	14600
Fatigue load limit	915
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	340
limit speed:	600
quality:	600

model

Column hole:	*230/670CA/W33
conical bore:	*230/670CAK/W33
	3

Dimensions are  
 mm


d:	670
d <sub>2</sub> ~ :	770
D1 ~ :	892
b:	22.3
k:	12
r <sub>1,2</sub> the min:	7.5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	698
Da the max:	952
r <sub>a</sub> the max:	6

Calculation coefficient

e:	0.21
----	------

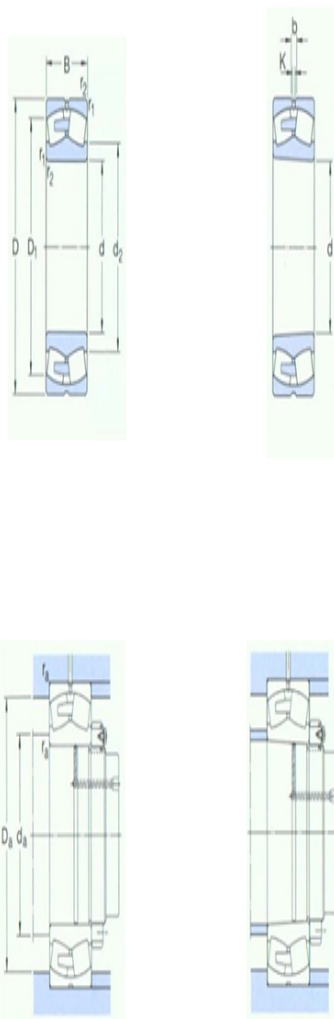

Y1:	3.2
Y2:	4.8
Y0:	3.2