



Model: 240/670ECA/W33

Basic size of
 mm

d:	670
D:	980
B:	308

The basic rated load is
 kN

trends C:	10000
static state Co:	20400
Fatigue load limit Pu:	1320

Rated rotation speed is
 r/min

Refer to the speed:	300
limit speed:	500
quality:	790

model


Column hole:	*240/670ECA/W33
conical bore:	*240/670ECAK30/W3 3

Dimensions are
 mm

d:	670
d ₂ ~ :	756
D1 ~ :	866
b:	22.3
k:	12
r _{1,2} the min:	7.5

Shoulder gear and chamfer size
 mm

d _a the min:	698
Da the max:	952
r _a the max:	6

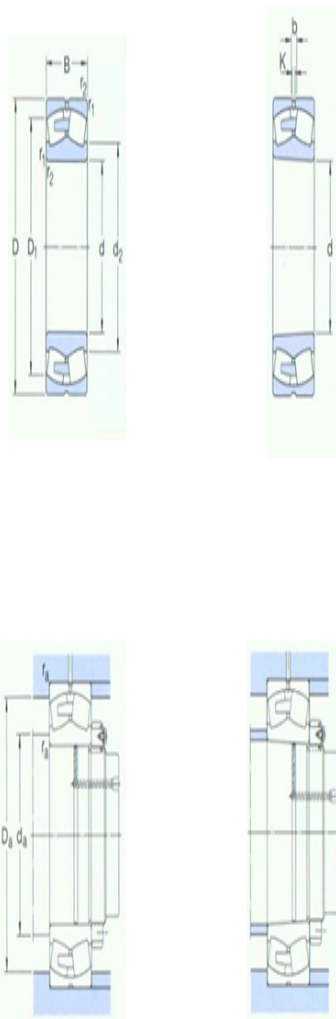

Calculation coefficient

e:	0.28
Y1:	2.4
Y2:	3.6
Y0:	2.5